

Metal Roofing

Isn't What It Used To Be[®]




Shake XD[™]

Shake XD™

Shake XD™ Installation Components:



Shake XD™ Panel:

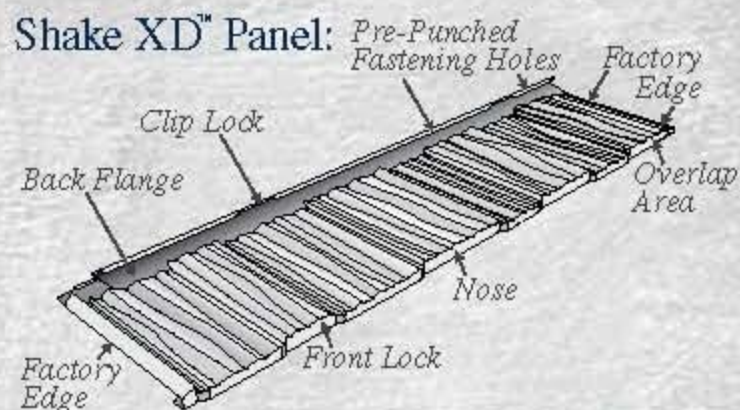

Shake XD™ Specifications:

| | |
|----------------------|----------------------|
| Panel Size ▶ | 14-1/8" x 52-1/8" |
| Installed Exposure ▶ | 12-3/8" x 49-7/8" |
| Panels per Square ▶ | 23.4 |
| Installed Weight ▶ | 150 lbs./100 sq. ft. |

Shake XD™ Features:

- Unique Hidden Fastener System
- No Special Tools Required
- Transferable 50 -Year Limited Warranty (including 120 mph winds and hail penetration)
- Class 4 Impact Resistance to UL 2218 by Underwriters Laboratories (highest rating)
- Lightweight only 150 lbs./100 sq. ft. Installed
- Non-Combustible Class A Rated Material
- Won't Crack, Break, Burn, Curl, Split or Rot
- Walkable, Low Maintenance
- Long Life, Non-Porous, Freeze /Thaw Resistant
- Interlocking Panels Provide Weather-Tight Barrier

traditional

classic beauty of handsplit wood shake



Shake XD™

DECRA Shake XD™ offers the classic beauty and architectural detail of a thick, rustic, handsplit wood shake combined with the superior performance and longevity of steel.

Shake XD™ is lightweight, durable and provides safety and security beyond other roofing products. The steel Shake XD™ panels support foot traffic and will not crack, split, curl or break like traditional wood shakes.

Color Blends



Antique Chestnut



Pinnacle Grey

Final color selection should be made from an actual product sample.

*50 - Year Limited Warranty; 120 mph Warranty; Highest Impact Resistance to Hail;
Freeze/Thaw Resistant; Fire Safe UL File #R14710; Florida Building Code,
Miami-Dade County NOA, CCMC and IGC-ES reports available*



877-833-3237